



The data to be read in conjunction with the Hydrogen Thyratron Preamble.

#### **ABRIDGED DATA**

Flange mounted ruggedised hydrogen-filled triode thyratron, positive grid, for pulse operation. A hydrogen reservoir is incorporated.

Peak forward anode voltage	18	kV max
Peak anode current	325	A max
Average anode current	500	mA max
Anode heating factor	3.9 x 10 <sup>9</sup> '	VApps max
Peak output power	2.6	MW max

#### **GENERAL**

#### **Electrical**

Cathode (connected internally		
to one end of heater)	oxide co	ated
Heater voltage	6.3 ± 5%	V
Heater current	10.6	Α
Tube heating time (minimum)	3.0	min

#### Mechanical

Seated height	194.0 mm (7.638 inches) max
Clearance required below	
mounting flange	31.75 mm (1.250 inch) min
Overall diameter (excluding	
	65.1 mm (2.563 inches) max
	400 g (14 ounces) approx
	any
Tube connections	see outline
Top cap	BS448-CT3
Top cap connector	MA359

Cooling ......natural



Whilst e2v technologies has taken care to ensure the accuracy of the information contained herein it accepts no responsibility for the consequences of any use thereof and also reserves the right to change the specification of goods without notice. e2v technologies accepts no liability beyond the set out in its standard conditions of sale in respect of infringement of third party patents arising from the use of tubes or other devices in accordance with information contained herein.

e2v technologies (uk) limited, Waterhouse Lane, Chelmsford, Essex CM1 2QU United Kingdom Holding Company: e2v technologies plc Telephone: +44 (0)1245 493493 Facsimile: +44 (0)1245 492492

 $Contact\ e2v\ by\ e-mail: \underline{enquiries@e2v.com}\ or\ visit\ \underline{www.e2v.com}\ for\ global\ sales\ and\ operations\ centres.$ 

## **PULSE MODULATOR SERVICE**

# MAXIMUM AND MINIMUM RATINGS

Min

May

(Absolute values)

N	/lin	Max	{
Anode			
Peak forward anode voltage (see note 1) Peak inverse anode voltage	-	18	kV
(see note 2)	-	18	kV
Peak anode current	-	325	Α
Average anode current  Rate of rise of anode current		500	mA
(see note 3)		1500	A/μs
Anode heating factor	-	3.9 x 10 <sup>9</sup>	VApps
Grid			
Unloaded grid drive pulse voltage			
(see note 4)20		-	V
Grid pulse duration	2.0	-	μS
(see note 3)18		-	V/μs
Peak inverse grid voltage		200	V
Loaded grid bias voltage		-120	V
grid drive circuit	-	500	Ω
Cathode			
Heater voltage	6	6.3 ± 5%	V
Tube heating time		-	min
Environmental			
Environmental performance		see	note 5
Ambient temperature –50	0		°C
Altitude	-	3	km
	-	10,000	ft

## **CHARACTERISTICS**

	Min	Тур	Max	
Critical DC anode voltage for conduction (see note 6)		0.3	1.0	kV
Anode delay time				
(see notes 6 and 7)		0.3	0.65	μS
Anode delay time drift				
(see notes 6 and 8)		0.05	0.1	μS
Time jitter (see notes 6 and 9)		-	15.0	ns
Recovery time			see gr	aph
Heater current (at 6.3 V)	9.6	10.6	11.6	Α


#### **NOTES**

- 1. This is the maximum forward hold-off voltage imposed on the thyratron in a pulse modulator circuit. Tubes are tested at 18 kV peak forward anode voltage, with the charging reactor inductance and pulse forming network capacitance resonant at 1000 pps. For instantaneous starting applications the maximum permissible peak forward voltage is 16 kV; this must not be reached in less than 0.04 s and there must be no overshoot.
- 2. In pulsed operation the peak inverse anode voltage, exclusive of a spike of 0.05 ms duration, must not exceed 5.0 kV during the first 25 μs after the pulse.
- 3. This rate of rise refers to that part of the leading edge of the pulse between 25% and 75% of the pulse amplitude.
- 4. Measured with respect to cathode potential.
- Original samples of this tube type have been successfully tested to transportation tests specified in BS EN 60068-2-64 test Fh and BS EN 60721-3-2 part 3, section 2.
- 6. The typical figures are obtained on test using conditions of minimum grid drive. Improved performance can be expected by increasing the grid drive.
- 7. The time interval between a point on the leading edge of the unloaded grid pulse at 25% of the pulse amplitude and the point where anode conduction takes place.
- 8. Normally taken as the drift in delay time over a 5-minute run at full ratings between the second and seventh minutes of operation.
- 9. The variation of firing time measured at 50% of current pulse amplitude.

## **HEALTH AND SAFETY HAZARDS**

Refer to PSD768198A.

## **MAXIMUM RECOVERY CHARACTERISTICS**

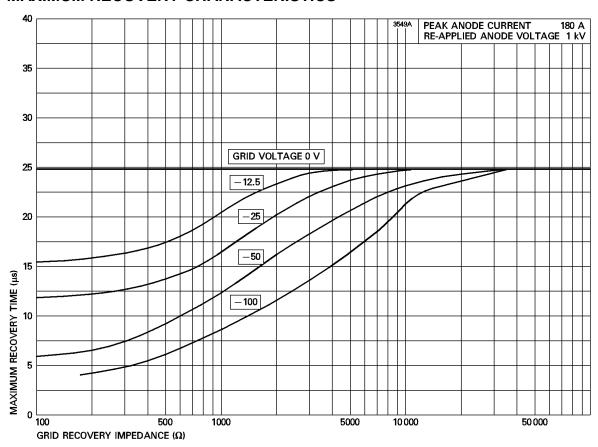

## **OUTLINE**

## (All dimensions without limits are nominal)

